



FICHA TECNICA

CFC2

CONTACTOR

Tipo	LC1					
		D09	D12	D18	D25	D32
Corriente de trabajo nominal (A)	AC3	9	12	18	25	32
	AC4	3.5	5	7.7	8.5	12
Potencias nominales estándar de Motores trifásicos 50/60Hz en categoría AC-3	220/230V	2.2	3	4	5.5	7.5
	380/400V	4	5.5	7.5	11	15
	415V	4	5.5	9	11	15
	500V	5.5	7.5	10	15	18.5
	660/690V	5.5	7.5	10	15	18.5
Corriente térmica nominal (A)		20	20	32	40	50
vida electrica	AC3(x10 ⁴)	100	100	100	100	800
	CA4(x10 ⁴)	20	20	20	20	20
Vida mecánica (x10 ⁴) ⁴		1000	1000	1000	20	800
Número de contactos	3P+NA/NC					


Tipo	LC1					
		D40	D50	D65	D80	D95
Corriente de trabajo nominal (A)	AC3	40	50	sesenta y cinco	80	95
	AC4	18.5	24	28	37	44
Potencias nominales estándar de Motores trifásicos 50/60Hz en categoría AC-3	220/230V	11	15	18.5	22	25
	380/400V	18.5	22	30	37	45
	415V	22	25	37	45	45
	500V	22	30	37	55	55
	660/690V	30	33	37	45	55
Corriente térmica nominal (A)		60	80	80	125	125
vida electrica	AC3(x10 ⁴)	80	60	60	60	60
	CA4(x10 ⁴)	15	15	15	10	10
Vida mecánica (x10 ⁴) ⁴		800	800	800	600	600
Número de contactos		3P+NC+NO				

Voltaje del circuito de control estándar:


Voltios	24	42	48	110	220	230	240	380	400	415	440	500	600
50Hz	B5	D5	E5	F5	M5	P5	U5	Q5	V5	N5	R5	T5	Y5
60Hz	B6	D6	E6	F6	M6	-	U6	Q6	-	-	R6	-	-
50/60Hz	B7	D7	E7	F7	M7	P7	U7	P7	V7	N7	R7	-	-

Tipo	A	B	C	D	mi	a	b	φ
LC1-D09--12	47	76	82	113	133	34/35	50/60	4.5
LC1-D18	47	76	87	118	138	34/35	50/60	4.5
LC1-D25	57	86	95	126	146	40	48	4.5
LC1-D32	57	86	100	131	151	40	48	4.5
LC1-D40--65	77	129	116	145	165	40	100/110	6.5
LC1-D80--95	87	129	127	175	195	40	100/110	6.

Contorno y dimensión de montaje:

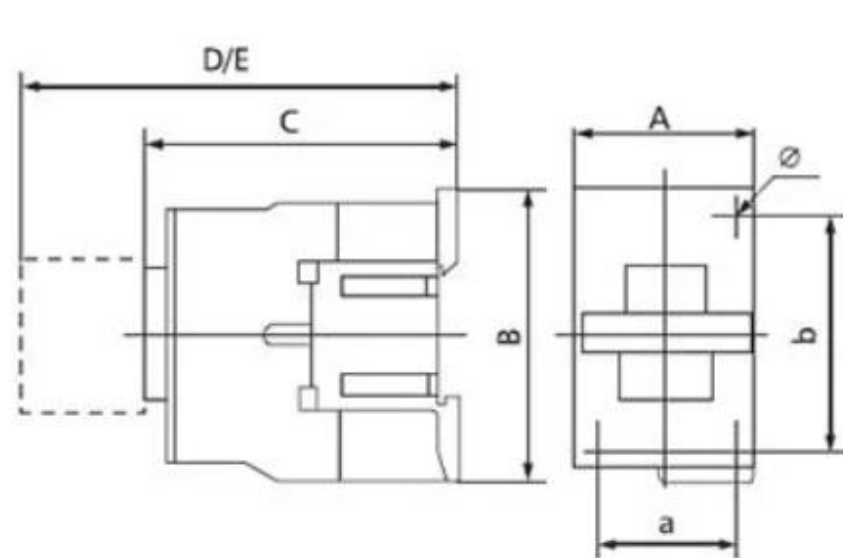

LC1-D09~32
LC1-ND09~32

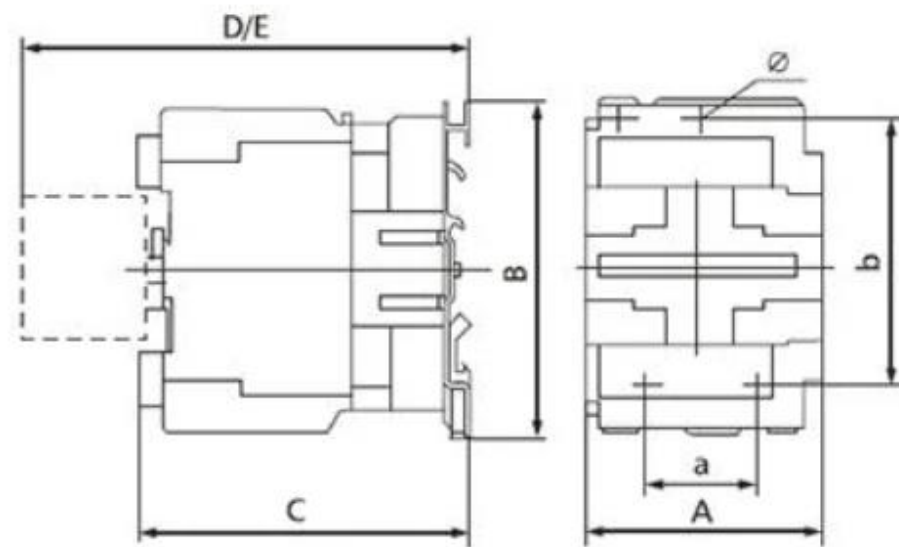

LC1-D40~95
LC1-ND40~95